

SHARP PRODUCT QUICK GUIDE

EMAIL STATUS & ALERTS - NEW USER INTERFACE

To obtain the IP Address:


- Press the "Settings" button on the machine's screen
- Select "Network Settings"
- Type in the administrator password (password: admin)
- Copy down the "IPv4 Address"

From your Computer:

- Type machine's IP address into an internet web browser.



- Log in as the administrator (Default password is 95973 or admin)
- Select System Settings Tab
- Select System Control

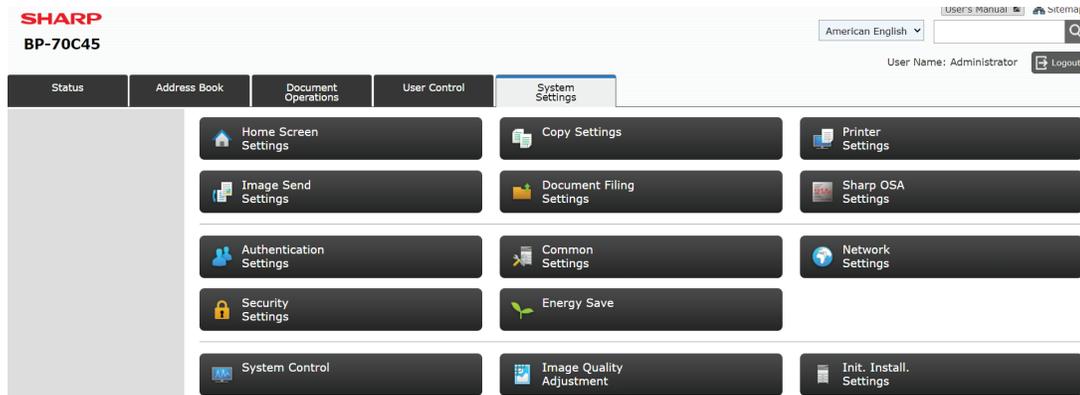

- Select Status Messages if you would like to send a status page to a specified email address
Scroll down to set the desired send schedule (Note: you can set two different schedules)



SHARP
BP-70C45

American English | User's Manual | Sitemap

User Name: Administrator | Logout

Status | Address Book | Document Operations | User Control | **System Settings**

System Control | Job Log | View Job Log | Job log Operation | Data Import/Export (CSV Format) | Storage Backup | Device Cloning | Filing Data Backup | Reset Settings | E-mail Alert and Status | **Status Message** | Alerts Message | SMTP Settings | Enhanced FSS Settings | Advanced Settings

Send Now(M)

Send by Schedule 1
 Send by Schedule 2

Time Schedule

Schedule 1: Daily - Every 1 day(s).
 Weekly - Every 2 week(s) on Monday
 Monthly - Every 1 month(s) on day 1 Day

Schedule 2: Daily - Every 1 day(s).
 Weekly - Every 1 week(s) on Sunday
 Monthly - Every 1 month(s) on day 1 Day

Submit(U) | Update(R)

Top of Page

- Scroll up to enter the desired email addresses that you wish to send the status pages to
- Select which schedule to send by

SHARP
BP-70C45

American English | User's Manual | Sitemap

User Name: Administrator | Logout

Status | Address Book | Document Operations | User Control | **System Settings**

System Control | Job Log | View Job Log | Job log Operation | Data Import/Export (CSV Format) | Storage Backup | Device Cloning | Filing Data Backup | Reset Settings | E-mail Alert and Status | **Status Message** | Alerts Message | SMTP Settings | Enhanced FSS Settings | Advanced Settings

Status Message

Update(R) | Back to Menu List

Standard | **Advanced**

Submit(U)

E-mail Status Message List 1

E-mail Address: uesharpredalerts@ubeo.com (Up to 200 characters)
Send Now(C)

Send by Schedule 1
 Send by Schedule 2

E-mail Status Message List 2

E-mail Address: (Up to 200 characters)
Send Now(O)

Top of Page

- Select Submit (these buttons can be found at the top or bottom of the page)
- Select Email Messages if you would like an email to be sent when certain alerts occur on the machine
- Enter the email address of the recipient you wish to receive the alerts (You can enter up to two separate email addresses)
- Select the alerts you wish to receive

- System Control
- Job Log
 - View Job Log
 - Job log Operation
- Data Import/Export (CSV Format)
- Storage Backup
- Device Cloning
- Filing Data Backup
- Reset Settings
- E-mail Alert and Status
 - Status Message
 - Alerts Message
 - SMTP Settings
 - Enhanced FSS Settings
 - Advanced Settings

Alerts Message

[Submit\(U\)](#) [Update\(R\)](#) Back to Menu List

E-mail Alert Message List 1

E-mail Address: (Up to 200 characters)

<input checked="" type="checkbox"/> Jam	<input checked="" type="checkbox"/> Toner Low
<input checked="" type="checkbox"/> Toner Empty	<input checked="" type="checkbox"/> Paper Empty
<input checked="" type="checkbox"/> Service Request	<input checked="" type="checkbox"/> PM Request
<input checked="" type="checkbox"/> Waste Toner Almost Full	<input checked="" type="checkbox"/> Waste Toner Full
<input checked="" type="checkbox"/> Job Log Full	<input type="checkbox"/> Security Alert

E-mail Alert Message List 2

E-mail Address: (Up to 200 characters)

<input checked="" type="checkbox"/> Jam	<input checked="" type="checkbox"/> Toner Low
<input checked="" type="checkbox"/> Toner Empty	<input checked="" type="checkbox"/> Paper Empty

[^ Top of Page](#)

- Select Submit (you can find this button at the top or bottom of the page)